

SERVICE BAY SPECIFICATIONS

HEIGHT: 13'6"/16'8" MINIMUM

WIDTH: 16' RECOMMENDED

DEPTH: 28' RECOMMENDED

POWER: 208-230VAC, 1PH, 30A

CONCRETE:
4" thick, reinforced, free from cracks/seams, 3500+ psi & cured 28+ days

16K 2-POST LIFT




EELS540A: Standard
EELS541A: Extended Height

SPECIFICATIONS

16k 16k Extended Height	EELS540A - Standard	EELS541A - Extended
Lifting Capacity	16,000 lbs. 7,257 kg	
Lift Configuration	Symmetric	
Arm Configuration	3-Stage Front & Rear	
Max. Load Per Arm	4,000 lbs.	
Rise Height	Min. 75½" Max. 81½" (w/stack adapters)	
Overall Height Options	13'6" 14' 14'6"	15'6" 16' 16'6"
Overall Width Options	Standard - 12'10¼" +6" - 13'4¾" +12" - 13'10¼"	
Floor to Overhead Switch	12'11" 13'5" 13'11"	14'11" 15'5" 15'11"
Arm Reach	Min. 36¾" Max. 75"	
Screw Pad Height	Min. 4¾" Max. 6½"	
Between Columns	Standard - 10' +6" - 10'6" +12" - 11'	
Rise Time	62 seconds	
Min. Ceiling Height Req.	13'8" 14'2" 14'8"	15'8" 16'2" 16'8"
ALI Certified	<input checked="" type="checkbox"/>	

SERVICE BAY LAYOUT

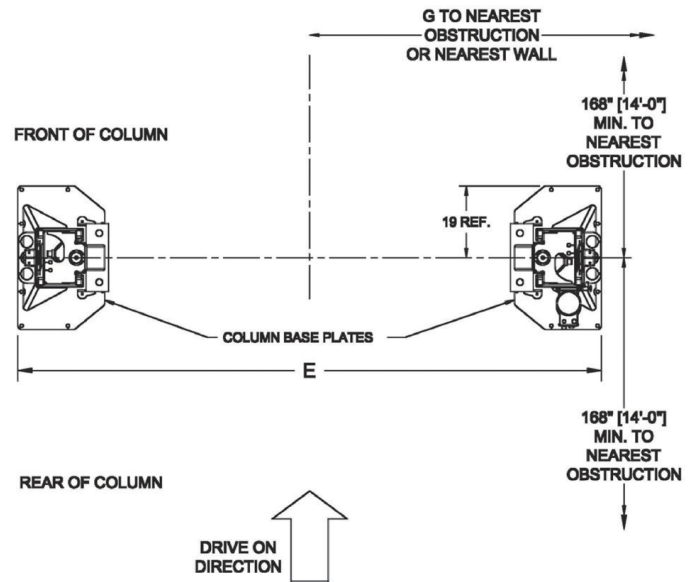

MANUAL PART NUMBERS

Lift

EAZ0080V84A