

T5345B 2S PLUS

CONVENTIONAL DESIGN

PREMIUM SERVICE

Loaded with productivity-enhancing features packed into a well-known design, the John Bean® T5345B 2S Plus is ideal for high-volume shops.

The tilt-tower design makes it easy to load tyres onto the work table and the pneumatic vertical arm provides quick and efficient positioning of the mounting head. Our exclusive PROspeed™ technology ensures that the optimum wheel speed is maintained during operation, while the ergonomically positioned, pedal-operated on-floor bead breaker makes quick work of breaking beads on high-aspect tyres. Our Pneumatic Bead Assist utilises a three-piece design that allows technicians to easily mount and demount challenging low-profile tyres.

The T5345B 2S Plus utilises self-centring jaws with three manual adjustment positions that securely clamp the wheel with the proper setup range. Our nylon-covered accessory protection minimises damages to wheels.

Certified by WDK, the T5345B 2S Plus is a workhorse tyre changer that's ready to become a key part of your shop's daily workflow.

Be FAST



TILT-TOWER

TYRE CHANGER



TILT-TOWER

The pneumatic Tilt-Tower post provides maximum clearance for installing the tyre on the turntable.



"PLUS" CONFIGURATION

Certified by WDK, the "Plus" models are equipped with Pneumatic Bead Assist and the "Plus" Accessories Kit to enable the correct mounting and demounting of UHP and run-flat tyres.



PROSPEED™

The innovative self-adjusting technology provides the optimum torque and maximises the rotation speed for safe, efficient operation.



TOP-SIDE BEAD SEATER

This ergonomic hand-held nozzle injects a high-speed blast of air into the tyre to raise the bead and seal the tyre to the rim.

WHEN GOOD ENOUGH ISN'T ENOUGH, JB.

JohnBean

T5345B 2S PLUS

TOOL BOX WITH INTEGRATED AIR PRESSURE GAUGE

The tool box provides a fixed storage area with four convenient shelves for tools, valves, and accessories, with an integrated air pressure gauge.

PNEUMATIC BEAD ASSIST


Our three-piece Pneumatic Bead Assist features a top roller, pressing foot, and lifting disk, to make it simple for a single technician to mount and demount low-profile and high-performance tyres.

ADJUSTABLE CLAMPING JAWS

Self-centring nylon-covered clamping jaws protect the wheel and provide a secure grip.

ON-FLOOR BEAD BREAKER (PEDAL-OPERATED)

Traditional side-shovel bead breaker with ergonomic pedal-control positioned away from the shovel; the fastest solution for standard, soft sidewall, and high-aspect tyres.

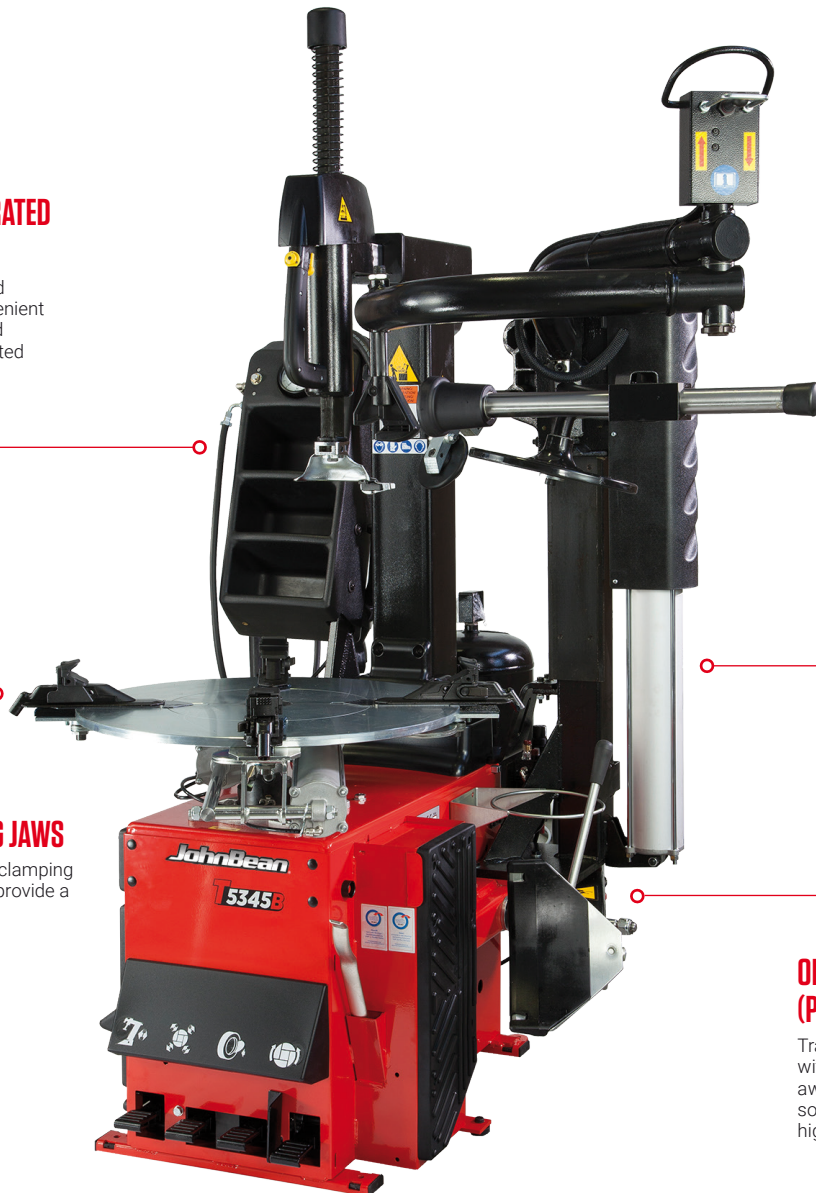

TECHNICAL SPECIFICATIONS

Max Rim Diameter	24" 61cm
Max Tyre Width	13" 33cm
Max Wheel Diameter	39" 100cm
Power Supply	230V 1ph 50-60Hz 16A
Air Pressure Required	116-174 PSI 8-12 bar
Dimensions HxWxD	64"x66"x49" 162x169x126cm

STANDARD ACCESSORIES

- Wave Lever Plus
- ave Lever Plus Protector
- 5 kg Lube Bucket Holder
- Lube Brush
- Plastic Protectors for Mounting Head
- Jaw Protectors - Front & Rear
- Plastic Tyre Protector
- Rim Protection and String
- Bead Breaker Blade Protector
- "Plus" Kit

OPTIONAL ACCESSORIES

- Quick Exchange Device with Mounting Head
- Bead Breaker Blade for Off-Road Wheels
- Wheel Lift
- MH Tractor Kit
- 4" Jaws Adaptors for Centre Type Sliding Jaws
- Light Truck Adaptor for Centre Type Sliding Jaws
- 8" Motorcycle and ATV Adaptors for Centre-type Sliding Jaws

FIND A DISTRIBUTOR



Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers, and tyre shops, thanks to the specific solutions provided by its portfolio of premium brands. John Bean is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2025 Snap-on Incorporated. John Bean is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. ssw22278b (EU en) 08/2025

AUSTRIA
+43 2641 24 5 24

FRANCE
+33 134 48 58 78

GERMANY
+49 8671 96200 0

ITALY
+39 0522 733 411

JB
johnbean.com